



# LEACH MINI REAR LOADER



## COMPACT, LIGHTWEIGHT, HIGHLY MANOEUVRABLE

The Leach Mini Rear Loader is a small and manoeuvrable garbage truck that will go where full size garbage trucks won't go. All available configurations from 8 to 17 yd<sup>3</sup>, are FET exempt. The large hopper makes it a highly productive unit. It's wide enough to handle commercial containers.

The 8 yd<sup>3</sup> and 10.5 yd<sup>3</sup> configurations can be mounted on most non-CDL type of chassis.



### 800 LBS / YD<sup>3</sup> COMPACTION

The powerful hydraulic system packs 800 lbs/yd<sup>3</sup>. The packer is rugged, and will never let you down, whatever you throw at it.



### FLAT FLOOR DESIGN

The body features a flat floor, supported by fully welded crossmembers for maximum strength and rigidity.



### OPTIMIZED FOR UNDER CDL OPERATION

Operators with a Commercial Driver's License (CDL) can be hard to find. That's why body length and mounting positions have all been carefully chosen to optimize the weight distribution, and hence maximize your payload on non-CDL trucks.

LEACH MINI REAR LOADER				
BODY CAPACITIES (YD <sup>3</sup> )	Mini		PACKER/CARRIER SPECIFICATIONS	
	8 yd <sup>3</sup>	10.5 yd <sup>3</sup>		
Overall width (in.)	98	98	Packer/carrier cycle time	
Overall length.			16-18 sec @ 1200 rpm	
Tailgate closed (in.)	161	187	Packer panel face plate	
Overall height above frame.			3/16 in. 72,000psi	
Tailgate closed (in.)	173-3/4	173-3/4	Carrier panel face plate	
Overall height above frame.			3/16 in. 72,000psi	
Tailgate opened (in.)	121-1/2	121-1/2	HYDRAULIC SPECIFICATIONS	
BODY SPECIFICATIONS				
Body floor	11ga 55,000psi		Pump	Gear
Body sides	12ga 45,000psi		Pump capacity	13 gpm @ 1200 rpm
Body roof	11ga 36,000psi		Max. Operating pressure	2,550 psi
HOPPER SPECIFICATIONS				
Hopper size (yd <sup>3</sup> )	1,5		Oil reservoir	30 gal
Hopper opening width	75 in.		CYLINDERS SPECIFICATIONS	
Hopper opening height	43-1/2 in.		Ejector cylinder (8 yd <sup>3</sup> bodies)	2 stages 4-1/2 in. bore
Hopper depth	13-3/4 in.		Ejector cylinder (10.5 yd <sup>3</sup> bodies)	3 stages 6 in. bore
Loading sill vs chassis frame	+1 in.		Packer cylinders	3 in. bore x 1-3/4 in. rod x 20 in. stroke
Hopper floor	0.2 in. AR450 175,000psi		Carrier cylinders	3-1/4 in. bore x 1-1/2 in. rod x 20 in. stroke
Hopper sides	0.2 in. AR450 175,000psi		Tailgate cylinders	3-1/2 in. bore x 3 in. rod x 20 in. stroke
EJECTOR SPECIFICATIONS				
Ejector panel face plate	1/8 in.			



LEACH MID RANGE MINI REAR LOADER				
BODY CAPACITIES (YD <sup>3</sup> )	Mini		PACKER/CARRIER SPECIFICATIONS	
	13 yd <sup>3</sup>	17 yd <sup>3</sup>		
Overall width (in.)	102	102	Packer/carrier cycle time	20-22 sec @ 1200 rpm
Overall length.			Packer panel face plate	3/16 in. 72,000psi
Tailgate closed (in.)	197	219	Carrier panel face plate	3/16 in. 72,000psi
Overall height above frame.			HYDRAULIC SPECIFICATIONS	
Tailgate closed (in.)	84-1/2	84-1/2	Pump	Gear
Overall height above frame.			Pump capacity	22 gpm @ 1200 rpm
Tailgate opened (in.)	154-1/2	154-1/2	Max. Operating pressure	2,550 psi
BODY SPECIFICATIONS				
Body floor	3/16 in. 55,000psi		Oil reservoir	30 gal
Body sides	3/16 in. 72,000psi		CYLINDERS SPECIFICATIONS	
Body roof	11ga 36,000psi		Ejector cylinder (13 yd <sup>3</sup> bodies)	3 stages 6 in. bore
			Ejector cylinder (17 yd <sup>3</sup> bodies)	3 stages 6 in. bore
HOPPER SPECIFICATIONS				
Hopper size (yd <sup>3</sup> )	2,2		Packer cylinders	4 in. bore x 3 in. rod x 23-1/2 in. stroke
Hopper opening width	80 in.		Carrier cylinders	4 in. bore x 1-3/4 in. rod x 29 in. stroke
Hopper opening height	49-1/2 in.		Tailgate cylinders	4 in. bore x 3-1/4 in. rod x 24 in. stroke
Hopper depth	17-1/2 in.			
Loading sill vs chassis frame	-2-1/2 in.			
Hopper floor	0.2 in. AR450 175,000psi			
Hopper sides	0.2 in. AR450 175,000psi			
EJECTOR SPECIFICATIONS				
Ejector panel face plate	1/8 in.			

Note: Specifications subject to changes without notice



## LABRIE ENVIROQUIP GROUP

Labrie Enviroquip Group is one of the largest manufacturer's of refuse and recycling collection vehicles in North America. Our product lines of Labrie, Leach, and Wittke are renowned to be the most reliable, efficient, productive, and innovative in the solid waste industry today.

Throughout our history, we have been recognized for the design and production of the highest quality vehicles available on the market, while our customers benefit from a single trusted source of engineering expertise.

At Labrie we continually push the boundaries of innovation to provide a greener, safer, smarter and more efficient way of waste management and collection.

We are committed to building and delivering the finest refuse collection equipment in the industry to suit all of your collection needs. With the strongest dealer network in the industry (over 45 distribution points across the continent), our stock and demo program, engineering expertise, and the Labrieplus 24/7 customer support center, Labrie delivers the ultimate ownership experience.

Labrieplus is Labrie's full service customer support center located in the U.S. Its mission is to provide quality replacement parts and premium hands-on field support to Labrie equipment owners. Labrieplus is the single source for Labrie, Leach, Wittke and Pendpac OEM and selected all makes of parts.

## DRIVE EXCELLENCE

Labrie is certified ISO 9001:2008 and attests to the quality of these products. Labrie has made every reasonable effort to ensure that the information contained in this brochure is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify designs, characteristics and products at any time. Contact Labrie for prices and options or to obtain the phone number of your local Labrie distributor. For the most recent version of our spec sheets, please go to Labrie website at [www.labriegrup.com](http://www.labriegrup.com). In case of discrepancy, the Web version takes precedence over any printed literature.

© Labrie Enviroquip Group 2015. - Printed in USA



Labrie (Head Office)  
175-B, route Marie-Victorin,  
Levis, Quebec, Canada G7A 2T3


Toll free: 800 463-6638 info@labriegrup.com  
Phone: 418 831-8250 www.labriegrup.com  
Fax: 418 831-5255



Labrie Parts Corp.  
627 Bay Shore Drive, Suite 500  
Oshkosh, WI 54901  
Phone: 1-800-231-2771  
Fax: 1-920-232-2498  
www.labrieplus.com



Enviroquip Parts, LLC  
1198 Shattuck Industrial Boulevard  
LaFayette, GA 30728  
Phone: 1-706-628-2467  
Fax: 1-706-639-9275  
www.partseq.com

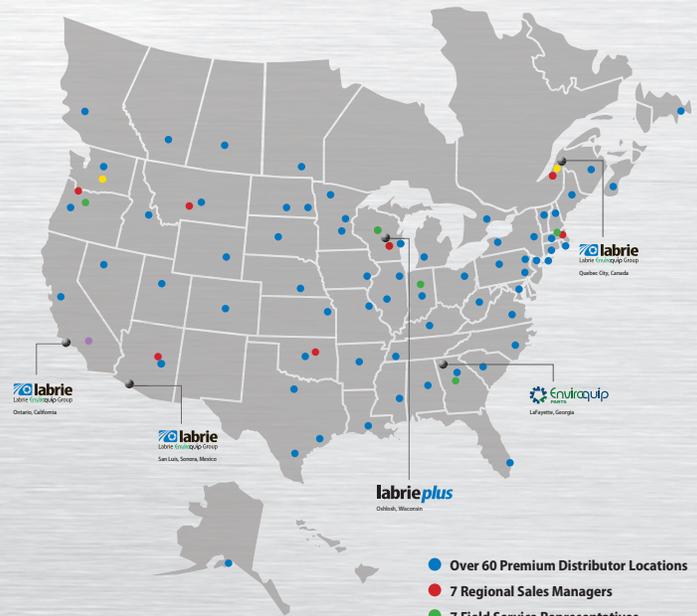

- Over 60 Premium Distributor Locations
- 7 Regional Sales Managers
- 7 Field Service Representatives
- 2 Technical Advisors / Demo Operators
- 1 National Account Manager

Visit [www.labriegrup.com](http://www.labriegrup.com) to view a complete listing of our premium distributor network

## PREMIUM PRODUCTS COME WITH PREMIUM SUPPORT.

Labrie is committed to delivering the ultimate ownership experience throughout North America. Our pursuit of excellence continues long after a Leach™, Labrie™ or Wittke™ is put into service.

### OUR NORTH AMERICAN NETWORK IS QUALITY DRIVEN:

- Labrieplus 24/7 customer support system, provides quality replacement parts, premium hands-on field and live assistance. Peace of mind guaranteed.
- A network of over 45 premium distributors located throughout the United States and Canada are highly trained to assist you; providing live assistance from a dedicated staff of professional representatives to support all of our Leach™, Labrie™ and Wittke™ products.